ORIGIN SMART
RETROFIT 92PZ, LIFT-TO-LOCK MPLS

- Ensure privacy
- Extremely secure & convenient
- Every fingerprint is unique
- No more lost keys
- No more replacing locks
- Simple DIY installation
- Unlock from anywhere
- Connect to smart home

FEATURES

Fingerprint	Bluetooth	Wi-Fi (Optional)	Card	Smartphone App	Simple Installation	Power Port

USES

Homeowners
Secure access for the family, share temporary keys with cleaners or guests, know when children are home safe.

Landlords
Secure rental properties, manage access from anywhere, stop replacing keys/locks.

Holiday Lets
Temporary keys for guests, manage key codes and unlock from anywhere, receive notifications.

Small Businesses
Keyless access to the office, up to 50 fingerprints and 50 key fobs, activity log, delivery access etc.
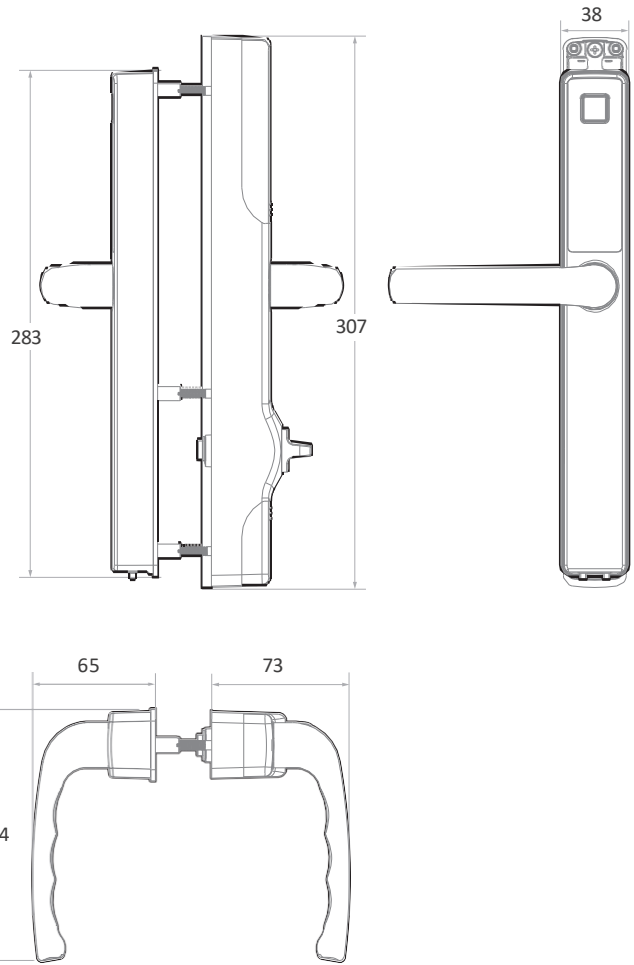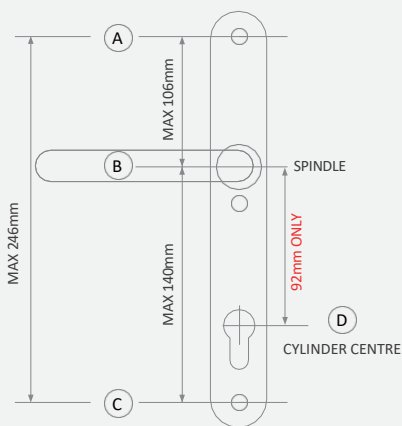
MULTIPLE FINISHES

Chrome

Satin Chrome

Black

TECHNICAL SPECIFICATION

Blusafe Origin Smart

283

307

38

65   73

134

Unit: mm

A

MAX 106mm

B   SPINDLE

MAX 246mm

MAX 140mm

92mm ONLY

D

CYLINDER CENTRE

C

01 The distance from the centre of the handle/spindle 'B' to the cylinder centre 'D' must be 92mm.

02 The distance between the top 'A' and bottom 'C' screw holes must not be more than 246mm.

03 The distance from the handle centre 'B' to the top screw hole 'A' must not be more than 106mm.

04 The distance from the handle centre 'B' to the bottom screw hole 'C' must not be more than 140mm.

www.blusafesolutions.co.uk

Designed to fit doors 1 3/4" (44mm) —— 3" (75mm) thick

1 3/4" (44mm)

3" (75mm)

TECHNICAL SPECIFICATION

Blusafe Origin Smart

Standard	prEN16867 TS 621 TS 007
IP Rating	IP65
Operating Temperature	-20℃ ~ 60℃
Humidity	10% ~ 95%RH
Power	4x AA Alkaline batteries
Battery Life	> 6 months
Backup Power	9V battery terminal for emergency power
Fingerprint	508dpi (Max fingerprint capacity 50)
RFID	2 x M1 cards (Max card capacity 50)
App	Blusafe Smart App or Your own Enterprise App
Wi-Fi	Wi-Fi capability with connect W-Fi Bridge (sold separately)
Smart Platforms	Customizable to your preference
Finish	Chrome/Satin Chrome/Black
Use	Entry doors using a lever operated multi-point lock 92mm PZ
Lock Type	92PZ lift-to-lock multipoint lock / mortise lock
Door Thickness	44-75mm (packer sold separately to suit 38-44mm doors)
Low Battery Warning	≤ 4.8V
System Requirements	iOS (11.0 or higher) or Android (6.0 or higher) smart devices